




1	2	3	4	5	6	7	8	
				REV. B	ECON. NO. LEN=0C00652~656	DATE 2010/11/26	SIGN Ivan	DESCRIPTION Change View

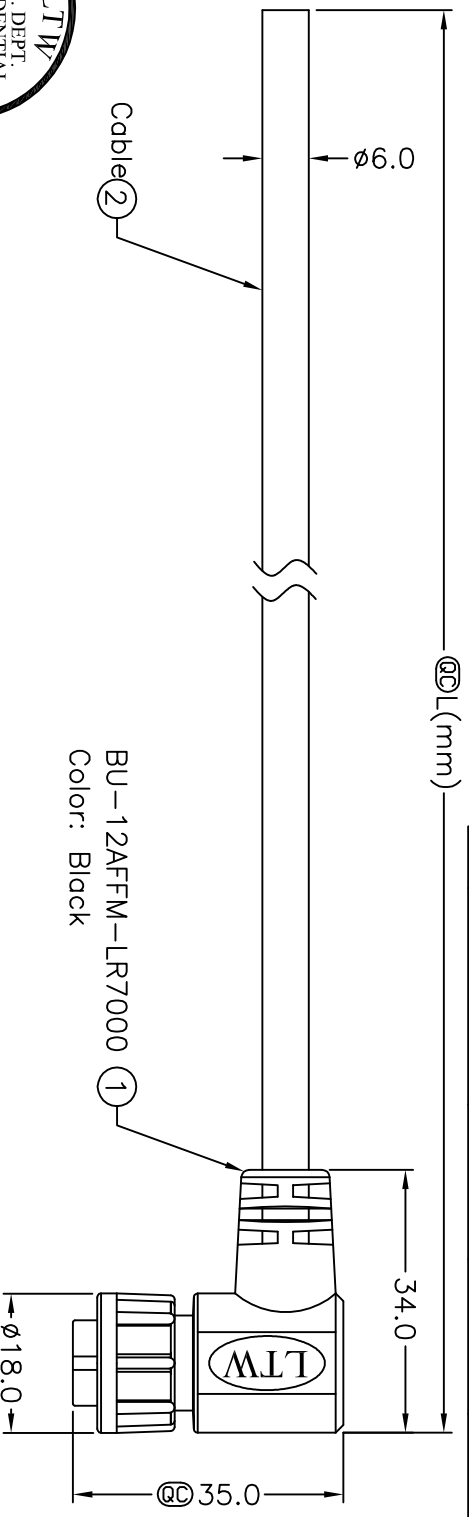

Light Green	淺綠	12
Purple	紫	11
Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1


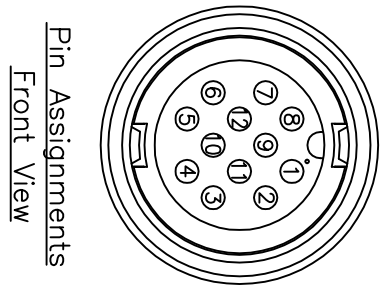


Pin Assignments
Front View

Pin Out

BU-12AFFM-LR7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :

99:99Meters
 Cable Length(L):01~99Meters



Note:

- * @Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF,Black
- * Female Pin: Copper Alloy,Gold Plated
- * Cable: UL246 26AWG*12C+Drain+Al/My PVC Jacket UV Resistant, OD=6.0,Black
- * Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm		TITLE	Standard
TOLERANCE	±0.5 mm	Cable Lock 12Pin F Conn. F Pin	
SCALE	F:ree	SHEET	1 OF 1
REV.	B	SIZE	A4
		Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	BU-12AFFM-LR7AXX	ALTW	Ivan	Aric	Yitung	2010/11/26