

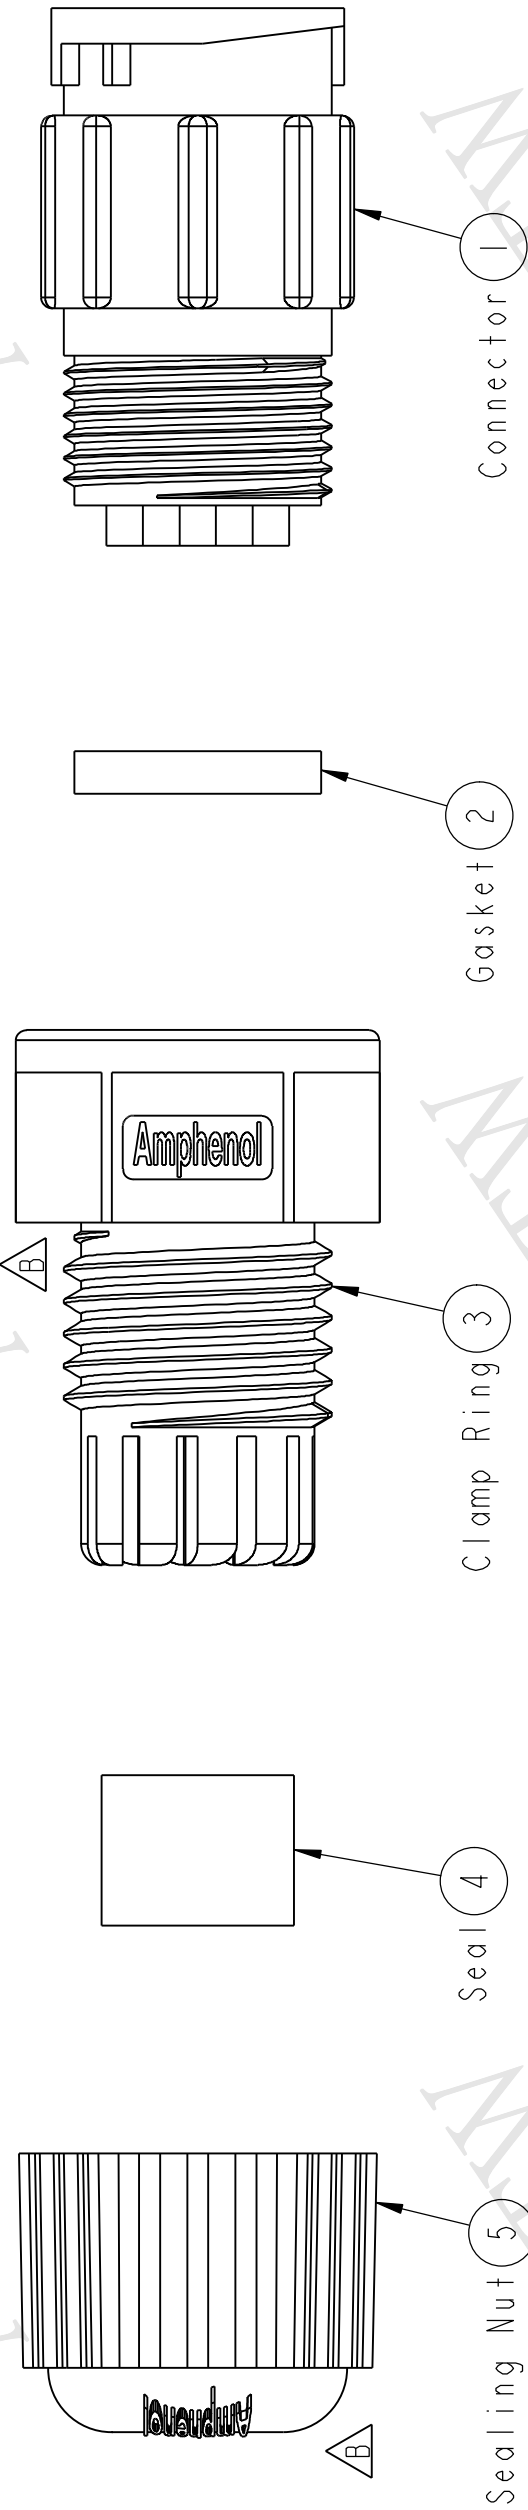
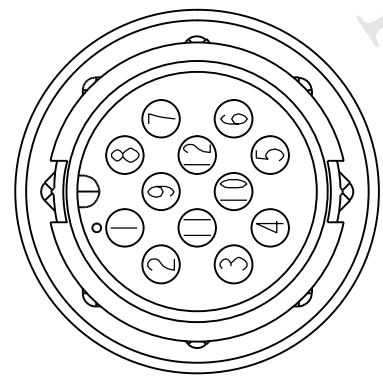
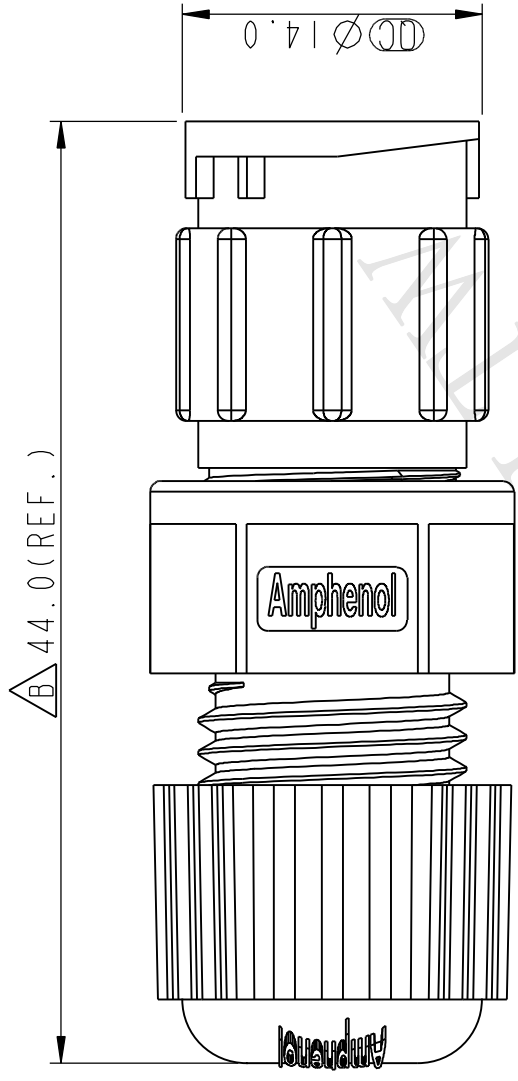


F		2	3	4	5	6	7	8
								
								
E								
D								
C								
B								
A	Pin Assignments Front View							
								
								Note: * QC Important Dimension To Check. * Waterproof Rate: IP67 * Housing: Nylon+GF, Black * Male Pin: Copper Alloy, Gold Plated * Gasket: EPDM, Black * Clamp Ring: Nylon, Black * Seal: EPDM, Black * Sealing Nut: Nylon, Black * Seal For Cable OD: $\phi 4.5\text{mm} \sim \phi 6.5\text{mm}$ (防水墊圈線徑: $\phi 4.5\text{mm} \sim \phi 6.5\text{mm}$) * One Set Unassembled In One PE Bag (每一組未組裝, 放置於一個PE袋, 並封口)

UNIT: mm		TOLERANCE		TITLE		ITEM NO		DATE	
.X ±0.25		.XX ±0.1		12Pin Male Connector Male Pin(2A) for Field Installation, Lock Type		BU-12BMMMA-LL7001		2014-12-15	
.XXX ±0.05		.XXX ±1°		SCALE 2:1		DWG NO BU-12BMMMA-LL7001		DATE 2014-12-15	
ANGLES		SHEET 1 OF 1		REV. B		CUSTOMER		DATE 2014-12-15	
		WC-REV. A.2		QC: Inspection item		ALTW		DATE 2014-12-15	
						DRAWN BY Vicky		APPROVED BY Rita	
						CHECKED BY Sam		DATE 2014-12-15	
						DATE 2014-12-15		DATE 2014-12-15	
						DATE 2014-12-15		DATE 2014-12-15	

Amphenol LTW
安費諾亮泰企業股份有限公司