

# Ordering Code CE57 S1 S A 1 00-C

- ① Series No.                   ① ②③④⑤ ⑥
- ② Contacts: S1=4+4 Contacts, S2=6+6 Contacts, S3=8+8 Contacts
- ③ Connector type: S=Receptacle
- ④ Plating code:  
 A=Selective Gold flash plated over 1.27μm(50μ") Nickel  
 B=Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel  
 C=Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color code: 1=Black, A= Up:Green, Down:Purple  
 B= Up:Purple, Down:Green
- ⑥ Other option: 00-C=Standard


Materials :

Insulator : Glass filled polyester UL 94V-0

Contact : Bress

Shell : Copper Alloy

Shell Plating: 80μ" Nickel over 50μ" Cu

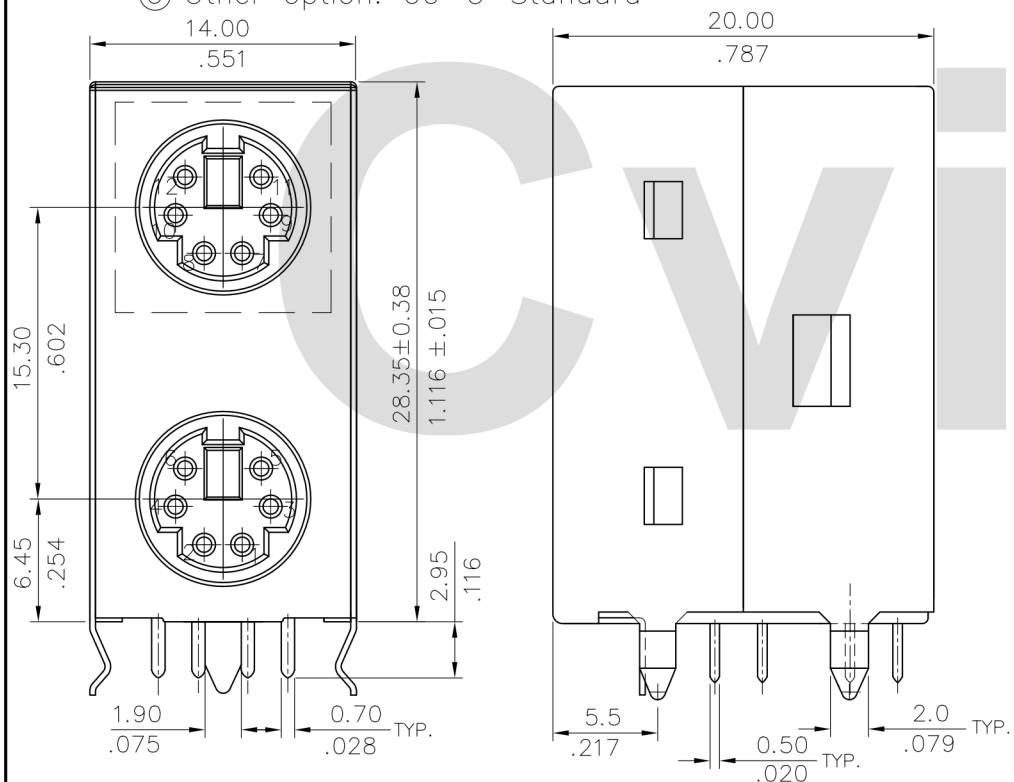

Part No.	CE57S1S**00	CE57S2S**00	CE57S3S**00
Circuits	4+4	6+6	8+8
Arrangement of Contact			
P.C Board Layout			
Tolerance	.X ± 0.10/.004 .XX ± 0.05/.002		

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: STACK TYPE MINI DIN SOCKET CONNECTOR	瀚荃股份有限公司 CviLux Corporation
③						DRAWN BY: Enya	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②						ENGINEER: Eisley	.X ± 0.38/150 .X ± 2'	FINISH:	
①						CHECKED BY: Eisley	.XX ± 0.25/010 .XX ± 1'		
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	9/18-12'	9/18-12'	.XXX ± 0.13/051 .XX ± 0.5'	DRAWING NO. CE5703SA	PART NO. CE57**S**00-C
								SCALE 2 / 1	SHEET 1 OF 1

CVILUX CORP  
 2012.10.11  
 ISSUED