




## CATALOGUE

# FICX Connector



## Range Overview


∟ Terminal Type: Screw



∟ Terminal Type: End barrier screw



∟ Accessories

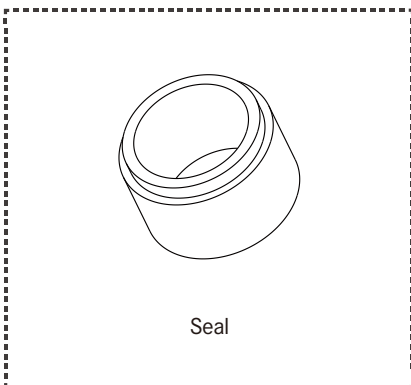

## Ordering Information

1 — 2 3 4

**Specification**

(SC-L) Cable Joiner

**Shape**

- (PG 11) I Tube Cable Joiner Screw type
- (PG 12) I Tube Cable Joiner End Barrier Screw Type
- (PG 13) Long Tube Cable Joiner End Barrier Screw Type
- (PGT2) T Tube Cable Joiner Screw type

**Number of Contacts**

- (02) 2 Contacts
- (03) 3 Contacts
- (04) 4 Contacts

**Cable O.D. (Seal Color)**

- (00) Without Seal
- (BL) 4.5~6.5mm
- (YW) 6.6~8.5mm
- (GN) 8.6~10.5mm
- (RD) PG11 & PGT2: 10.6 ~ 12.5mm  
PG12 & PG13: 10.6 ~ 11.5mm


# Find Our Standard Products

## └ I Tube

SC-L-PG11- ①-②




CE RoHS

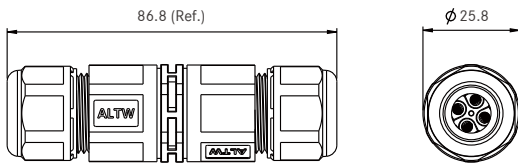

Unit: mm

\*Spanner: 24mm

- Screw type of terminal block housing



- Waterproof rating: IP68 (50m/24hrs)
- In-house UV resistance test: 720hrs
- Accommodate a wide range of wire and cable's OD
- Quick and easy Installation
- Color Identification for sealing
- Easy-grip design

### General Specification

Number of Positions (Code ①)	2P (02), 3P (03), 4P (04)
Current Rating	20A for 2P, 3P & 4P
Voltage Rating	450V
Operating Temperature	-40°C~105°C
Wire Section	18~14 AWG (0.75~2.5 mm <sup>2</sup> )
Cable OD (Seal Color, Code ②)	(00) Without Seal ● (BL) 4.5~6.5mm ● (YW) 6.6~8.5mm ● (GN) 8.6~10.5mm ● (RD) 10.6~12.5mm

### Material Specification

Gland Nut	PA6+GF, Black
Gasket	Silicon, Yellow
L-Gasket	Silicon, Yellow
Seal	Silicon
Gland Pipe	PA66, Black
Terminal Block Housing	PA66+GF, Black
Contact	Brass, Nickel Plated
Screw	Stainless Steel


【Note】 Design and specification are subject to change without notice.

∨ I Tube


SC-L-PG12- ① - ②



CE RoHS

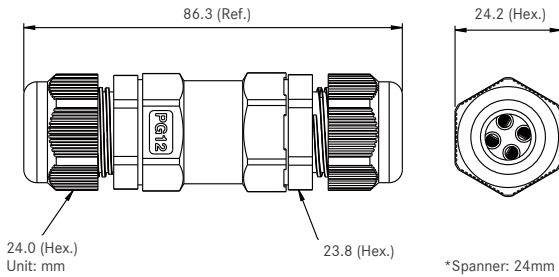

- End barrier screw type of terminal block housing



- Waterproof rating: IP68 (50m/24hrs)
- In-house UV resistance test: 720hrs
- Accommodate a wide range of wire and cable's OD
- Quick and easy Installation
- Color Identification for sealing
- Easy-grip design

General Specification

Number of Positions (Code ①)	2P (02), 3P (03), 4P (04)
Current Rating	20A for 2P & 3P 15A for 4P
Voltage Rating	450V
Operating Temperature	-40°C~105°C
Wire Section	18~14 AWG (0.75~2.5 mm <sup>2</sup> )
Cable OD (Seal Color, Code ②)	(00) Without Seal
	● (BL) 4.5~6.5mm
	● (YW) 6.6~8.5mm
	● (GN) 8.6~10.5mm
	● (RD) 10.6~12.5mm

Material Specification


Gland Nut	PA6+GF, Black
Gland Body	PA66, Black
L-Gasket	Silicone
Seal	Silicone
Gland Pipe	PA66, Black
Terminal Block Housing	PA66+GF, Black
Contact	Brass, Nickel Plated
Screw	Stainless Steel

∟ XI Tube

SC-L-PG13- ① - ②




CE RoHS

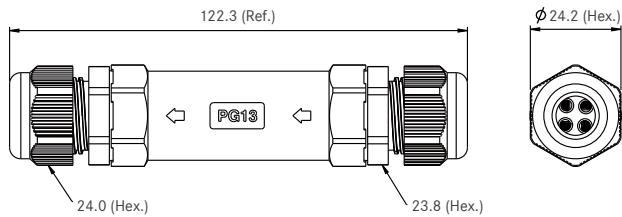

Unit: mm

\*Spanner: 24mm

- End barrier screw type of terminal block housing



- Waterproof rating: IP68 (50m/24hrs)
- In-house UV resistance test: 720hrs
- Accommodate a wide range of wire and cable's OD
- Quick and easy Installation
- Color Identification for sealing
- Easy-grip design

General Specification

Number of Positions (Code ① )	2P (02) , 3P (03) , 4P (04)
Current Rating	20A for 2 & 3P 15A for 4P
Voltage Rating	450V
Operating Temperature	-40°C~ 105°C
Wire Section	18~14 AWG (0.75~2.5 mm <sup>2</sup> )
Cable OD (Seal Color, Code ②)	(00) Without Seal ● (BL) 4.5~6.5mm ● (YW) 6.6~8.5mm ● (GN) 8.6~10.5mm ● (RD) 10.6~12.5mm

Material Specification

Gland Nut	PA6+GF, Black
Gland Body	PA66, Black
L-Gasket	Silicone
Seal	Silicone
Gland Pipe	PA66, Black
Terminal Block Housing	PA66+GF, Black
Contact	Brass, Nickel Plated
Screw	Stainless Steel


【Note】 Design and specification are subject to change without notice.

∨ T Tube

SC-L-PGT2-①-②




CE RoHS

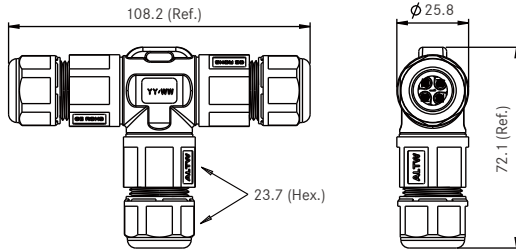

Unit: mm

\*Spanner: 24mm

- Screw type of terminal block housing



- Waterproof rating: IP68 (50m/24hrs)
- In-house UV resistance test: 720hrs
- Accommodate a wide range of wire and cable's OD
- Quick and easy Installation
- Color Identification for sealing
- Easy-grip design

General Specification


Number of Positions (Code ①)	2P (02) , 3P (03) , 4P (04)
Current Rating	20A for 2P 15A for 3 & 4P
Voltage Rating	450V
Operating Temperature	-40°C~105°C
Wire Section	18~14 AWG (0.75~2.5 mm <sup>2</sup> )
Cable OD (Seal Color, Code ②)	(00) Without Seal ● (BL) 4.5~6.5mm ● (YW) 6.6~8.5mm ● (GN) 8.6~10.5mm ● (RD) 10.6~12.5mm

Material Specification

Gland Nut	PA6+GF, Black
Gasket	Silicone, Yellow
L-Gasket	Silicone, Yellow
Seal	Silicone
Gland Pipe	PA66, Black
Terminal Block Housing	PA66+GF, Black
Contact	Brass, Nickel Plated
Screw	Stainless Steel

## Accessories


### Seal for PG11 & PGT2 SC-PG-SL-XX-001

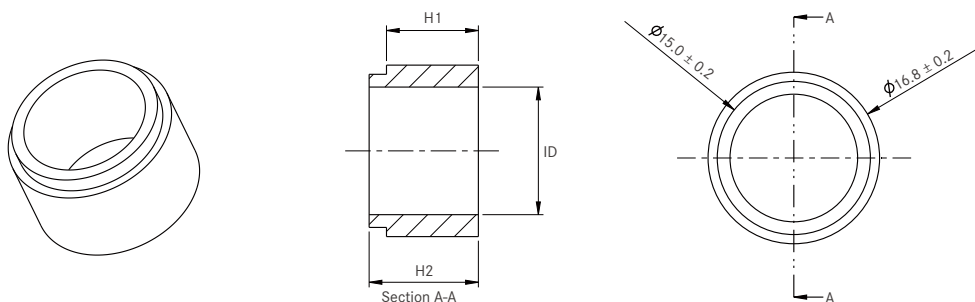

<u>XX</u> : Seal Color	H1	H2	ID	Cable Range
● Blue (BL)	9.0	10.7	6.5	Φ4.5 ~ Φ6.5
● Yellow (YW)	9.0	10.7	8.5	Φ6.6 ~ Φ8.5
● Green (GN)	9.0	10.7	10.5	Φ8.6 ~ Φ10.5
● Red (RD)	9.0	10.7	12.5	Φ10.6 ~ Φ12.5

Unit: mm

### Seal for PG12 & PG13 SC-PG-SL-XX-002

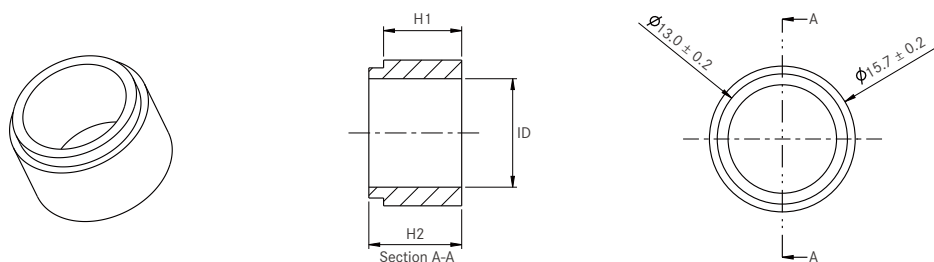

<u>XX</u> : Seal Color	H1	H2	ID	Cable Range
● Blue (BL)	8.5	10.3	6.5	Φ4.5 ~ Φ6.5
● Yellow (YW)	8.5	10.3	8.5	Φ6.6 ~ Φ8.5
● Green (GN)	8.5	10.3	10.5	Φ8.6 ~ Φ10.5
● Red (RD)	8.5	10.3	12.5	Φ10.6 ~ Φ11.5

Unit: mm

【Note】 Design and specification are subject to change without notice.

**Amphenol LTW Technology Co., Ltd.**

5F-3, No.51, Sec.4, Zhongyang Rd., Tucheng Dist., New Taipei City 236, Taiwan  
Telephone: +886-2-77416888 Fax: +886-2-77416999  
[www.amphenolltw.com](http://www.amphenolltw.com)

**Kunshan Factory**

No. 62, DaTong Road, Development Zone, Kunshan City, JiangSu Province, 215333 China  
Telephone: +86-512-5761-0501  
Fax: : +86-512-5761-0515

**For further information, please contact :**

Sales & Marketing Department | Email : [sales@ltw-tech.com](mailto:sales@ltw-tech.com)