


PIN OUT

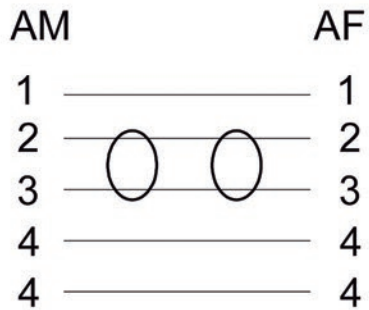


COPPER BLACK HDPE(7*0.12BC)

COPPER RED HDPE (7*0.12BC)

PVC jacket White 4.0mm

COPPER GREEN HDPE (7*0.10BC)

COPPER RED HDPE (7*0.10BC)

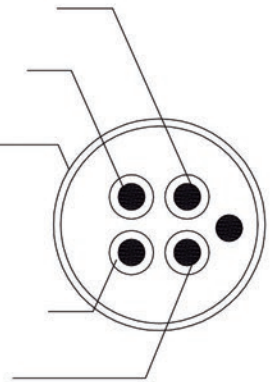

Electronic parameters:

1, 100% OPEN, SHORT & WIRE TEST

2, Insulation Resistance: 20 MEGA ohm(MIN)/300VDC/10ms

4	MOLDING	RoHS PVC	1	BLACK
3	PLUG	USB A MALE	1	NICKEL
2	CABLE	UL2725(7*0.10BC)*1P+(7*0.12BC)*2C+ Al-foil+Braiding 48#+Drain +PVC 4.0mm	1	BLACK
1	PLUG	USB MICRO5P MALE	1	NICKEL
No.	PART NAME	MATERIAL	Q'TY	REMARKS

SECCON Secon Indústria Comércio LTDA

DRAWING	Rechards	DRAWING NO.	CUSTOMER
CHECKED	Linsa		UL STYLE
APPROVED			
DATA	2018.06.22	HL-US003-1.8M	