


PIN OUT

AM	MINI 5P
1	1
2	2
3	3
4	4

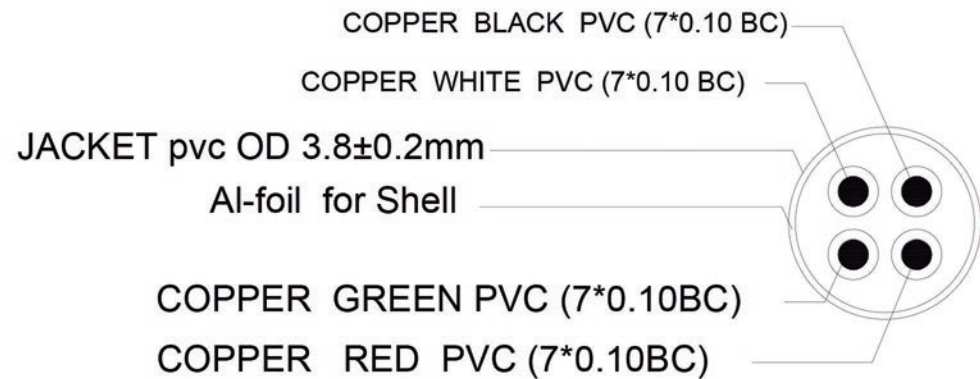

Electronic parameters:

1, 100% OPEN, SHORT & WIRE TEST

2, Insulation Resistance: 20 MEGA ohm(MIN)/300VDC/10ms

4	MOLDING	RoHS pvc	1	BLACK
3	PLUG	USB MINI 5p	1	NICKEL
2	CABLE	UL2725(7*0.10BC)*2C+(7*0.10BC)*2C+ Al-foil + D + PVC OD= 3.8mm MM COLOR:black	1	BLACK
1	PLUG	USB A MALE	1	NICKEL
No.	PART NAME	MATERIAL	Q'TY	REMARKS

SECCON Seccion Indústria Comércio LTDA			
DRAWING	Rechards	DRAWING NO.	CUSTOMER
CHECKED	Linsa		UL STYLE
APPROVED		HL-US003	
DATA	2016.04.05		