
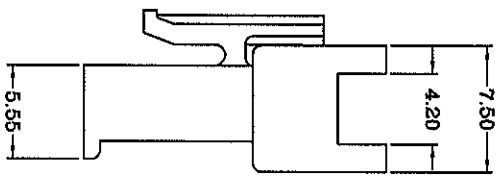


DIMENSIONS:

CIRCUITS	DIM. A	DIM. B	DIM. B
2	2.50	8.00	5.50
3	5.00	10.50	8.00
4	7.50	13.00	10.5
5	10.00	15.50	13.00
6	12.50	18.00	15.50
7	15.00	20.50	18.00
8	17.50	23.00	20.50
9	20.00	25.50	23.00
10	22.50	28.00	25.50
11	25.00	30.50	28.00
12	27.50	33.00	30.50

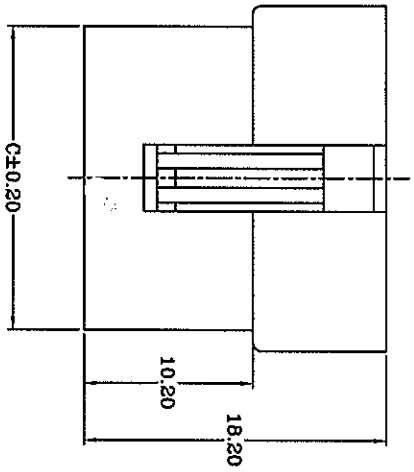

ORDER INFORMATION: **A**


2550M XX 0 X (BLACK COLOR)
 2550M XX 0 X -X

CIRCUITS NO. _____ COLOR NO. S=NATURAL (WHITE)

MATERIAL: 0-NY-66 94V-0

SPECIFICATION:

- * MATERIAL : NYLON 66,94V-0
- * CIRCUITS : 2~12P
- * ACCEPT TERMINAL : 2550TM SERIES

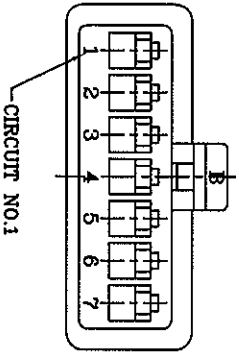

RoHS Compliant
 Customer Drawing

MATERIAL: NYLON 66,94V-0		SCALE		FREE	SHEET	1 OF 1
FINISH(COLOR): SEE NOTES		DRAWN BY: <i>gq</i>		16/OCT/09	UNIT	mm
FILE NAME: T1A091002		DATE: 23/DEC/05		APPROVED BY: <i>L</i>	16/OCT/09	REV. G
CHANGE DRAW NO.		MODIFY MARK		GENERAL TOLERANCE: (AQ) 2550MXX0X-X		
CHANGE DESIGN & ADD DIM		NEW TOOL		ANGLE: ±3°		
MARK CHANGE		ADD COLOR&TYPE		DIM: ±0.5 ±0.25 ±0.12 ±0.08		
REV. REVISION RECORD		ECN NO.		TITLE: 2.5mm Pitch HOUSING(MALE)		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO LANDWIN ELECTRONIC CORP. SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.



聯盈電子股份有限公司
 LANDWIN ELECTRONIC CORP.