
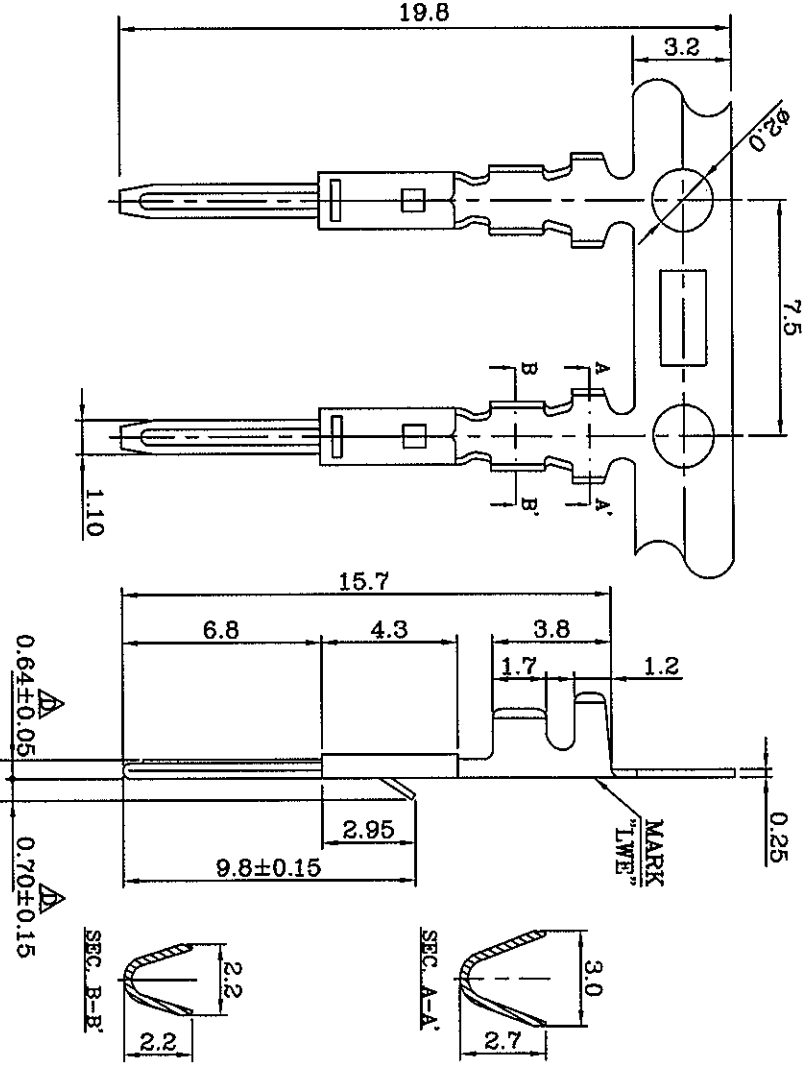


12 11 10 9 8 7 6 5 4 3 2 1

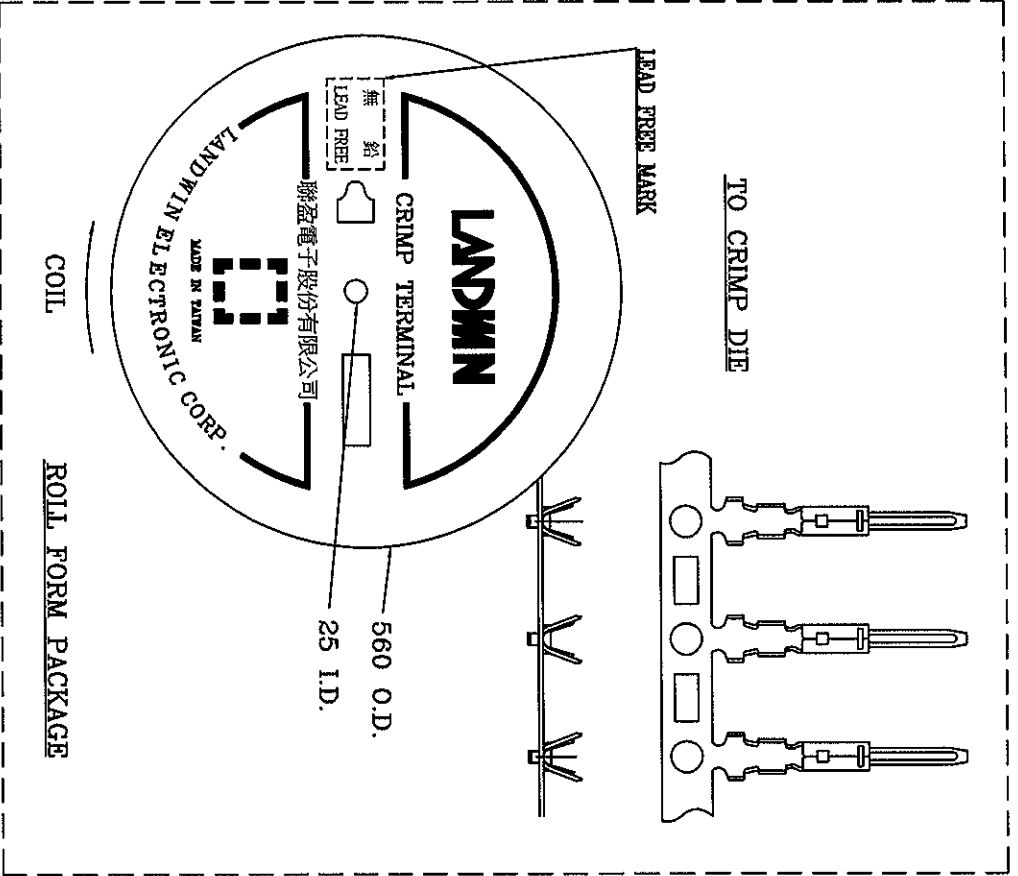

ORDER INFORMATION:  $\Delta$   
 2550TM1 2 X  
 MATERIAL: 2=BRASS  
 PLATING:  
 1=GOLD FLASH  
 R=TIN-PLATED  
 V=Matte Tin-Plated

RoHS Compliant  
 Customer Drawing

ORDER NO.	TERMINAL TYPE	WIRE GAUGE	INSULATION DIAMETER	REEL Q'TY
2550TM12X	CHAIN	#22~#28	$\phi$ 1.8 MAX.	7000 PCS

ORDER NO./DIMENSIONS  $\Delta$

NOTES:  
 \* MATERIAL: BRASS 0.25t  
 \* ACCEPT HOUSING: 2550M SERIES

MATERIAL: BRASS	FINISH(COLOR): SEE NOTES	SCALE	FREE	SHEET	1 OF 1
FILE NAME:		DRAWN BY: Ken/LL	30/JUL/10	UNIT	mm
ADD PLATING, CHANGE TOL.	T1100717	APPROVED BY: LL	30/JUL/10	REV.	D
ADD PLATED	901202	GENERAL TOLERANCE:	(BQ)	TITLE:	2550TM12X
TOLERANCE CHANGE		ANGLE:	DIM:		
NEW RELEASE	29/JAN/99	$\pm 3^\circ$	±0.5 ±0.25 ±0.12 ±0.08		CRIMP TERMINAL
REV/REVISION RECORD	ECN NO. DATE				

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO LANDWIN ELECTRONIC CORP. SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.