

△ ORDER INFORMATION:


6353TM22 X  
6353TM22 X -X  
Plating: — Guage No. (X=1)  
R=Tin Plated  
V=Matte Tin-Plated  
Z=UN-Plated

△ ORDER NO./DIMENSIONS

ORDER NO.	TERMINAL TYPE	WIRE GAUGE	INSULATION DIAMETER	REEL Q'TY
6353TM22X	CHAIN	#18~#24	φ2.7 MAX.	4,000 PCS
6353TM22X-1	CHAIN	#14~#18	φ3.5 MAX.	4,000 PCS

\* ACCEPT HOUSING : 6350M SERIES PLUG HOUSING.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO LANDWIN ELECTRONIC CORP. SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

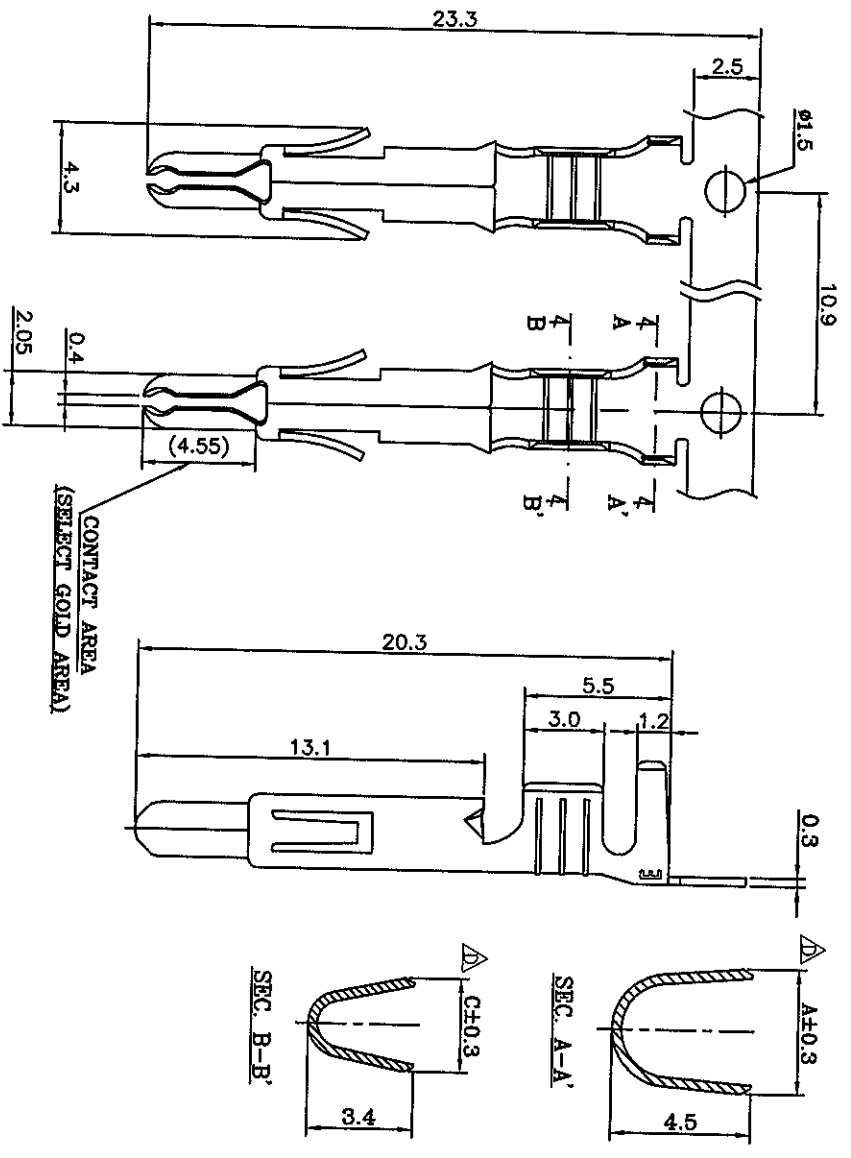

△ DIMENSION:

WIRE GAUGE	DIM. A	DIM. C
#18~#24	3.8	2.6
#14~#18	4.5	3.4

RoHS Compliant  
Customer Drawing

MATERIAL: BRASS 0.3t  
FINISH(COLOR):  
FILE NAME:

**LANDWIN** 聯盈電子股份有限公司  
LANDWIN ELECTRONIC CORP.

REV.	REVISION RECORD	ECN NO.	DATE	SCALE	FREE	SHEET	1 OF 1
A	NEW RELEASE		10-MAR-04				
B	CHANGE DIM	930308	10-MAR-04				
C	ADD/CHANGE GAUGE NO.	T1100825	16-MAR-12				
D	ADD UN-PLATED	T1111224	16-MAR-12				

DRAWN BY: 廖文治, 16-MAR-12  
APPROVED BY: 廖文治, 16-MAR-12  
GENERAL TOLERANCE: (BQ) 6353TM22X-X  
ANGLE: DIM: ±0.5, ±0.25, ±0.12, ±0.08

TITLE: CRIMP TERMINAL