
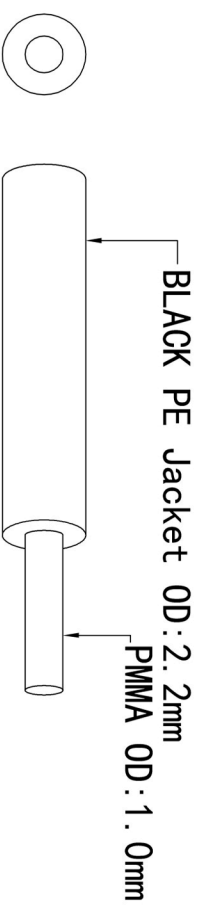



胶料	料号	模具	模号/AB端
内模料		内模	
中模料		中模	
外模料		外模	

ELECTRICAL TEST:
 1>. 100% open short test;
 2>. Transmission Loss: $\leq 0.2\text{dB/m}$;
 3>. Insertion Loss: $\leq 3.0\text{dB}$;
 4>. Application Wavelength: 650nm;

CONSUMER ITEM	LENGTH (mm)	ERP	Packing
0F-1001A/2M	2000 \pm 30		
0F-1001A/3M	3000 \pm 30		
0F-1001A/5M	5000 \pm 50		
0F-1001A/10M	10000 \pm 100		
0F-1001A/15M	15000 \pm 100		
0F-1001A/20M	20000 \pm 100		

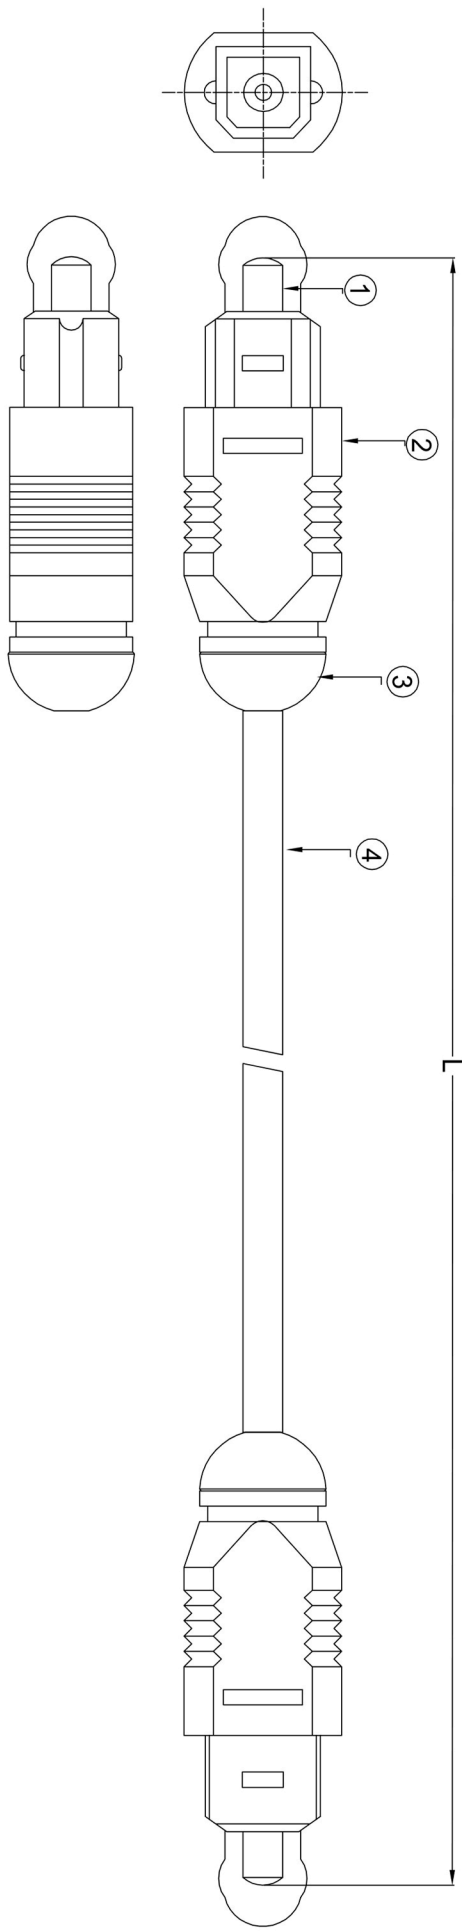

NO.	PART NAME	DESCRIPTION	UNIT
④	CABLE	Optical Fiber Cable OD: $\varnothing 2.2\text{mm}$ BLACK PVC Jacket	m
③	OUTER MODEL	PVC MOLDING, COLOR: Black	g
②	CONNECTOR	ABS MOLDING, COLOR: Black	g
①	Toslink Male	Optical fiber needle /Gold plated	2pcs

 SECCON INDUSTRIA E COMERCIO LTDA.			
DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT
MODEL NO.	0F-1001A	\triangle	UNITS: MM
DRAWING NO.		\triangle	1RD ANGLE
FINISHING		\triangle	
MATERIAL		SYM	DATE
			2017/10/12
			REVISION
			A1