



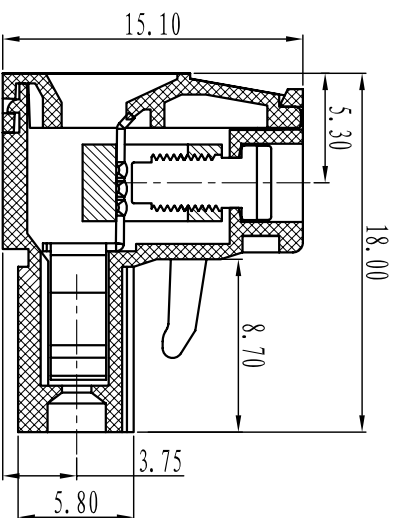


慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

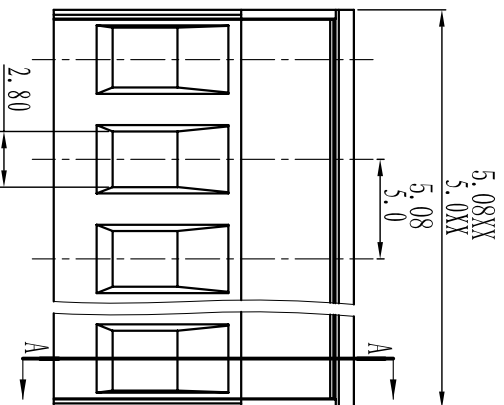


SECTION A-A

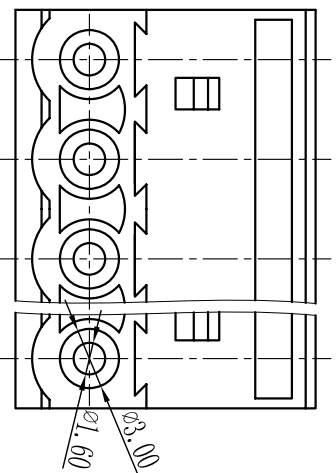

TOLERANCES EXCEPT AS NOTED

	Linear dimension	fillet	chamfer	short angle sid				
variable range	over 6 to 30	over 120 to 480	all to 6	over 6 to 10	over 50 to 120	all to 5	over 5 to 30	over 120 to 120
tolerance	± 0.1 to ± 0.2	± 0.3 to ± 0.5	± 0.2 to ± 0.5	± 1 to $1'$	$30'$ to $20'$	$10'$ to 0.5	0.025 to 0.06	0.12 to 0.4

订购方式：
HOW TO ORDER

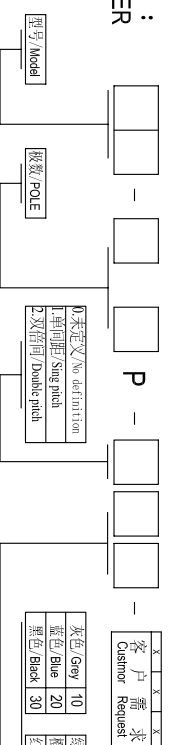

电气性能/Electrical
参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 320V
额定电流/Rated current: 15A 20A
接触电阻/Contact resistance: 20m Ω
使用线径/Wire range: 28-14AWG 2.5mm²
耐电压/Withstanding voltage: AC2000V/1Min
绝缘电阻/Insulation resistance: 500M Ω /DC500V

机械性能/Mechanical
温度范围/Temp. Range: -40 $^{\circ}$ C+105 $^{\circ}$ C
扭矩/Torque: 0.5Nm (4.51lb`in)
剥线长度/Strip length: 7-8mm

尺寸/Dimensions
间距/Pitch: 5.00mm, 5.08mm
极数/Poles: 2P-24P

材质及电镀/Material
塑件/Housing: PA66, U94V-0
螺丝/Screws: M3.0, steel Zinc plated
方块/Wire guard: Brass, Ni plated
簧片/Clamp: Phosphor bronze, Ni plated

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE 比例

第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ2HDK-XYP-11Y-00A