


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

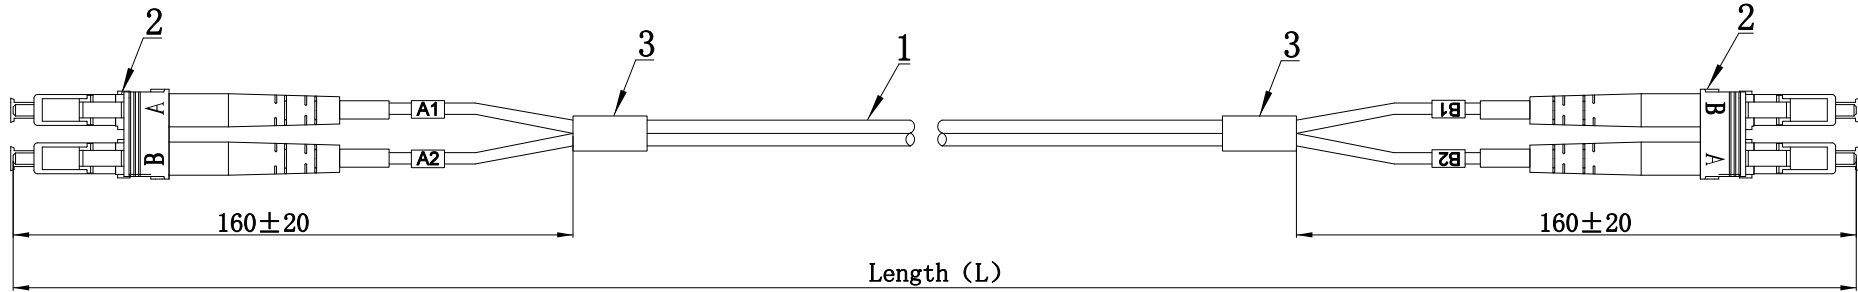

Tolerances (ΔL):

$L \leq 1m$	$-1cm \leq \Delta L \leq +10cm$
$1m < L \leq 10m$	$-10cm \leq \Delta L \leq +10cm$
$L \geq 10m$	$-10cm \leq \Delta L \leq 1\% * L$

Specifications:

Type	DLC/UPC-DLC/UPC
Test Wavelength (nm)	850/1300
Insertion loss (dB)	≤ 0.3
Return loss (dB)	≥ 35
Operating Temperature ($^{\circ}C$)	$-25 \sim +70$
Storage Temperature ($^{\circ}C$)	$-25 \sim +70$

3	Heat shrinkable tube	Black	2	PCS
2	Connector	DLC-UPC-MM-2.0, Beige	2	PCS
1	Fiber Cable	Duplex 2.0mm OM3 LSZH Aqua	$L + \Delta L$	M
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

APPROVED BY & DATE: James Yang 03/16/2022		Product Name: NKLT-LULU2C20C2.250C			
CHECKED BY & DATE:		DESCRIPTION: DLC/UPC-DLC/UPC-OM3-LSZH-2.0-L			
DESIGNED BY & DATE:	DATE:	REV: D1	UNIT: MM	SHEET: 1 OF 1	SCALE: 1 : 1

