


POWERCOM ELECTRONICS LTD.  
 8F,669 Pan Nan Rd Chung Ho Dist, New Taipei City 23557  
 Taiwan(R.O.C) / TEL: (886 2) 8221-3356 FAX: (886 2) 8221-3856



UNLESS OTHERWISE SPECIFIED TOLERANCE				图号	日期	品名	HDMI 2.0 AM-DM-AM(AOC)			
ANG	TOL	DIM	TOL	制图	2023.03.02	ZLX-HDMI2.1-19-303-XXM				
.X	±3.0°	.X	±0.10	审核			单位	比例	页码	版本
.XX	±2.0°	.XX	±0.05	核准			mm	1:1	1/1	1
.XXX	±1.0°	.XXX	±0.03							

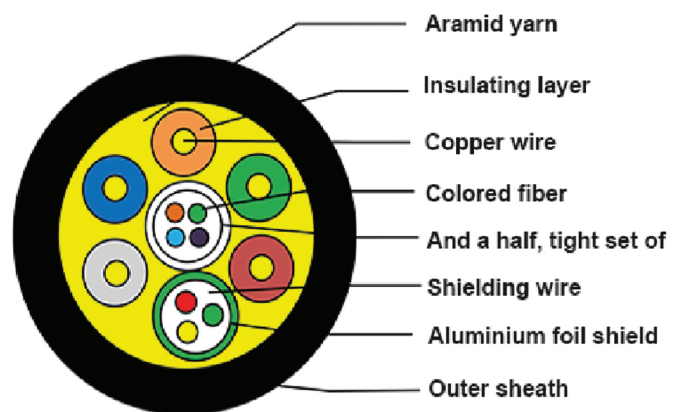

**NOTE:**

- Supports computer resolutions to 4K@120Hz or 8K@60Hz 4:4:4
- Plug and Play
- Support HDCP2.2@eARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel