


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

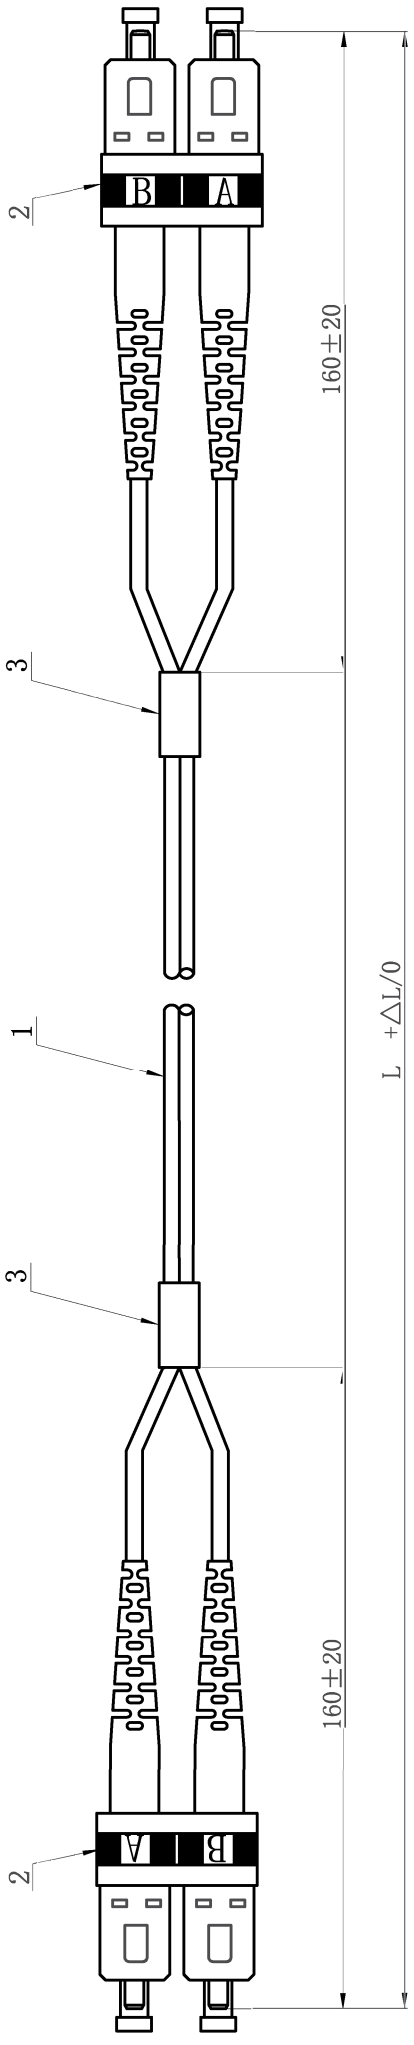

Tolerances (ΔL):

$L \leq 1m$	$-1cm \leq \Delta L \leq +10cm$
$1m < L \leq 10m$	$-10cm \leq \Delta L \leq +10cm$
$L \geq 10m$	$-10cm \leq \Delta L \leq 1\% * L$

Specifications:

Type	DSC/UPC-DSC/UPC
Test Wavelength (nm)	850/1300
Insertion loss (dB)	≤ 0.3
Return loss (dB)	≥ 35
Operating Temperature ($^{\circ}C$)	$-25 \sim +70$
Storage Temperature ($^{\circ}C$)	$-25 \sim +70$



APPROVED BY & DATE:	Product Name:
James Yang 05/06/2024	DSC-DSC Patchcord
CHECKED BY & DATE:	DESCRIPTION:
	DSC/UPC-DSC/UPC-0M2-LSZH-2.0-L
DESIGNED BY & DATE:	DATE:
	2024/06/05
	REV:
	D1
	UNIT:
	MM
	SHEET:
	1 OF 1
	SCALE:
	1 : 1

NO.	PART NAME	QTY	UNIT	SPECIFICATION DESCRIPTION
3	Heat shrinkable tube Black	2	PCS	
2	Connector DSC/UPC 2.0, Beige	2	PCS	
1	Fiber Cable 2xø2.0-20M2-LSZH-Yellow	L+ΔL	M	